

TB条系列封闭型接线端子

产品概述

绝缘件采用阻燃聚碳酸酯，导电片组合螺钉压接条形结构，额定工作电压600V，导线额定截面积为0.75-25mm²，平板螺钉孔安装，特别适用于平板要求的控制设备电器中使用。



JH(TB)-1503



JH(TB)-1504



JH(TB)-1506




JH(TB)-4503



JH(TB)-4505



JH(TB)-4506

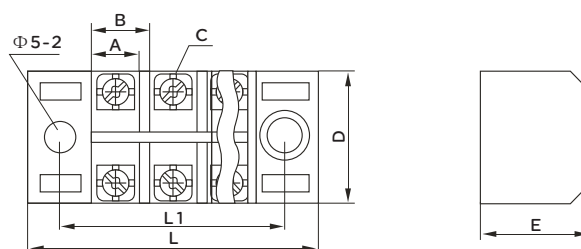

技术参数

型号规格	电压电流 额定截面	接线位数	尺寸(mm)						
			L	L1	A	B	C	D	E
TB-1503	600V 15A 0.75-1-1.5	3	46	35.5	7.5	9	M3	22	17
TB-1504		4	55	43.5	7.5	9	M3	22	17
TB-1506		6	73	63	7.5	9	M3	22	17
TB-1512		12	127	115	7.5	9	M3	22	17
TB-2503	600V 25A 1-1.5-2.5	3	50	44.5	10.5	12	M4	30	20
TB-2504		4	62.5	57	10.5	12	M4	30	20
TB-2506		6	91	81.5	10.5	12	M4	30	20
TB-2512		12	163	153	10.5	12	M4	30	20
TB-4503	600V 45A 2.5-4-6	3	70	0.5	15	15	M5	38	23.5
TB-4504		4	86	75.5	15	15	M5	38	23.5
TB-4506		6	120.5	110	15	15	M5	38	23.5
TB-603	600V 60A 4-6-10	3	70.5	65.5	15.5	15.5	M6	38	31
TB-604		4	93.5	82.5	15.5	15.5	M6	38	31
TB-606		6	129	118	15.5	15.5	M6	38	31
TB(C)-1003	600V 100A 10-16-25	3	86.5	75.5	22	22	M6	43.5	35
TB(C)-1004		4	108	96	22	22	M6	43.5	35
TB(C)-1006		6	153	140	22	22	M6	43.5	35