

## BZM-10


系列防爆照明开关(II B)



### 适用范围 Application

- 适用于1区、2区危险场所。
- 适用于II A、II B类，温度组别为T1~ T6的爆炸性气体环境。
- Can be used in hazardous areas: Zone 1 and Zone 2.
- Can be used in explosive gas atmospheres of Category IIA and 、 II B where the temperature classification is T1 ~ T6.

### 型号含义 Model implication

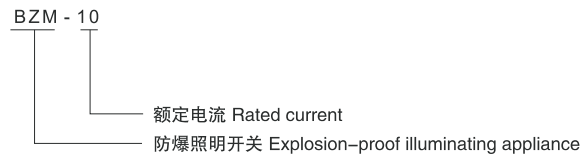

### 技术参数 Technical parameters

- |   |  |
|---|--|
| ■ 执行标准：GB 3836.1、GB 3836.2、<br>GB 3836.3、IEC60079、<br>GB12476.1 | ■ Implementing the standard : GB 3836.1、GB 3836.2、<br>GB 3836.3、IEC60079、<br>GB12476.1 |
| ■ 额定电压：AC 220V  | ■ Rated voltage: AC220V  |
| ■ 额定电流：10A  | ■ Rated current: 10A   |
| ■ 防爆标志：Exde II BT6 Gb/DIP A20TA,T6                              | ■ Explosion-proof mark: Exde II BT6 Gb/DIP A20TA,T6                                    |
| ■ 防护等级：IP65   | ■ Protection grade: IP65   |
| ■ 防腐等级：WF1  | ■ Corrosion-proof grade: WF1   |
| ■ 进线口螺纹：G3/4"   | ■ Inlet thread: G3/4"  |
| ■ 电缆外径：φ9mm~ φ14mm  | ■ Cable's outer diameter: φ9mm~ φ14mm  |

### 产品特点 Features

- |  |  |
|--|--|
| ■ 壳体采用ZL102铝合金压铸成型，表面粉末静电喷塑，结构紧凑，外形美观； | ■ The housing is die cast in aluminum alloy, with high voltage static plastic-sprayed surface.                   |
| ■ 产品为复合型结构，增安型外壳内装防爆型开关；               | ■ The product is of composite structure, with explosion-proof switch built in the increased safety type housing; |
| ■ 产品具有防水、防尘等特点；                        | ■ Water-proof, dust-proof.   |
| ■ 钢管或电缆布线。                             | ■ Conduit wiring or cable wiring.  |

www. peopleex. cn

## BZM-10

Type explosion-proof illumination switch ( II B)

### 外形及安装举例 Outline and mounting example

