

BLK-DIP


系列粉尘防爆断路器(DIP)



适用范围 Application

- 适用于20区、21区、22区危险场所。
- 适用于可燃性粉尘环境。
- Can be used in hazardous areas: Zone 20, Zone 21 and Zone 22.
- Can be used in explosive or flammable dust atmosphere.

型号含义 Model implication

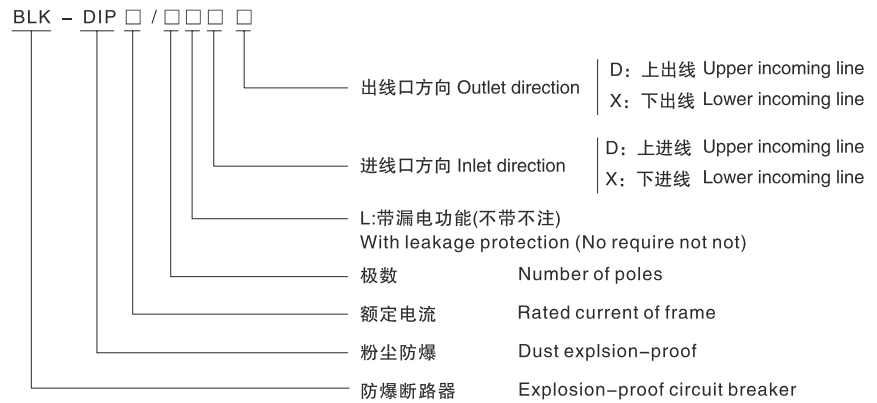

主要技术参数 Main technical parameters

- 执行标准: GB 12476.1
- 防爆标志: DIPA20 TA, T6
- 额定电压: AC 380/220V
- 防护等级: IP65
- 防腐等级: WF1
- Implementing the standard : GB 12476.1
- Explosion-proof mark: DIPA20TA, T6
- Rated voltage: AC380/220V
- Protection grade: IP65
- Corrosion-proof grade: Wf1

BLK-DIP

Type dust explosion-proof circuit breaker (DIP)

型号 Type	脱扣器额定电流(A) Rated current of trip	进线口螺纹(G") Inlet's thread	电缆外径(φ,mm) Cable's outside diameter
BLK-DIP32	1、3、5、10、15、20、25、32	1	11~18
BLK-DIP63	40、50、63(60)	1 1/2	14~25

产品特点 Features

- 壳体采用ZL102铝合金压铸成型，表面粉末静电喷塑；
- 内装高分断小型断路器或塑壳断路器；
- 具有过载、短路等自保护功能，可根据用户要求增加漏电保护装置；
- 电缆或钢管布线。
- The housing is die cast in aluminum alloy, with high voltage static plastic-sprayed surface.
- Inside is installed minicircuit breaker of high breaking capacity.
- With overload and shortcircuit protection, leakage protection is available as required.
- Conduit wiring or cable wiring.

产品特点 Features

