

BXJ-DIP

Type dust explosion-proof junction box (DIP)




适用范围 Application

- 适用于20区、21区、22区危险场所。
- 适用于可燃性粉尘环境。
- Can be used in hazardous areas: Zone 21 and Zone 22.
- Can be used in explosive or flammable dust atmosphere.

型号含义 Model implication

BXJ-DIP □/□ D □(□) L □(□) X □(□) R □(□)

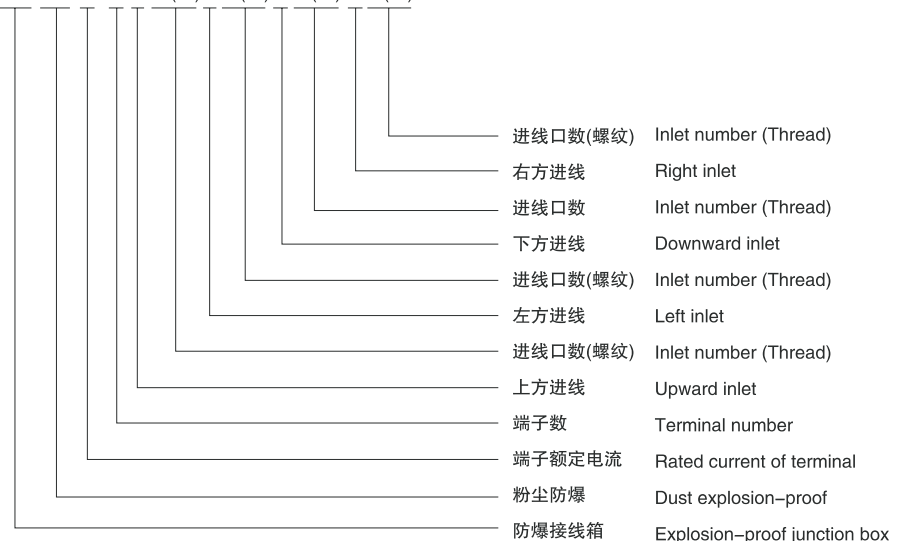

主要技术参数 Main technical parameters

- | | |
|----------------------|--|
| ■ 执行标准: GB 12476.1 | ■ Implementing the standard : GB 12476.1 |
| ■ 防爆标志: DIPA20TA, T6 | ■ Explosion-proof mark: DIPA20TA, T6 |
| ■ 额定电压: AC 380V | ■ Rated voltage: AC 380V |
| ■ 额定电流: 20A | ■ Rated current: 20A |
| ■ 防护等级: IP65 | ■ Protection grade: IP65 |
| ■ 防腐等级: WF1 | ■ Corrosion-proof grade: WF1 |

www.peopleex.cn

BXJ-DIP

系列粉尘防爆接线箱(DIPA 20)

产品特点 Features

- 壳体采用ZL102铝合金压铸成型，表面高压静电喷塑；
- 进线口方向可根据用户要求确定；
- 进出线口螺纹可特制，可制成公制螺纹，NPT螺纹等形式。
- The housing is die cast in aluminum alloy, with high voltage static plastic-sprayed surface.
- Inlet or outlet has many kinds of modes and specifications.
- Thread specification can be specially designed, and can be designed metric thread and thread NPT etc.

外形及安装举例 Outline and mounting example

